


60mm
60mm
60mm
60mm
60mm
60mm

80 mm

BASIC INFORMATION





This simple and elegantly designed switch is very comfortable to touch, enabling the execution of three sets of commands separately. This switch, which is available in 1, 2, 3, and 4 gangs with 1.3cm thickness, can be carried and stuck anywhere you want to perform scenes such as off mode, home mode, movie mode, etc. . Single Click, Double Click, and Long Press are required to perform preset commands either manually or using your TIS App . It is useful for offices, hotels, balconies, bedrooms, kitchens, and more.

WARNINGS & SAFETY INSTRUCTIONS

The following must be read, kept, and observed before installation:

- Installation must be carried out by a qualified electrician in accordance with local regulations.
- Keep the device out of the reach of children and away from water and damp or hot environments.
- Install the device away from strong signal sources, such as microwave ovens, which may cause signal interruption resulting in abnormal device operation.
- Obstruction by concrete walls or metallic materials may reduce the effective operation range of the device and should be avoided.
- Do not attempt to disassemble, repair, or modify the device by yourself.


MOUNTING THE DEVICE

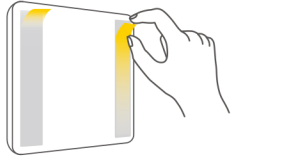
Fix it anywhere you like using the double-sided tape on the back of the switch

CONFIGURATION

- Download the App**
Search for TIS Control & download the app
- Set up your hub (if not already set in the application)**

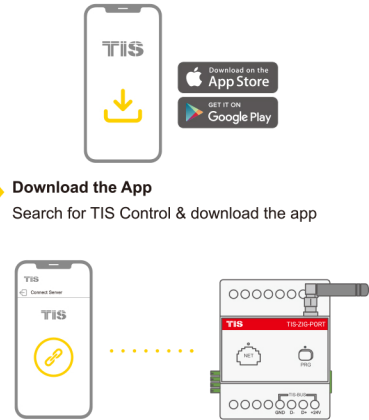


- Go to Settings, and enter the default username and password**
- Add the Device**
In the TIS-Bee configuration, press Add Device. Then, follow the instructions to add the device using the 2 available methods

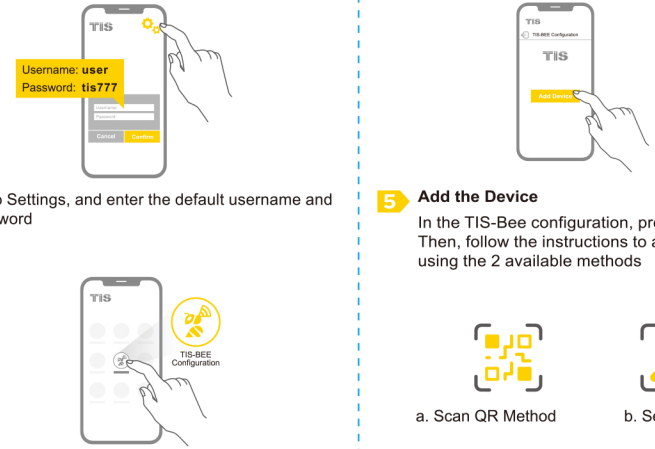


a. Scan QR Method b. Search Method

Select whichever method you prefer, and follow the instructions on the app

TECHNICAL SPECIFICATIONS



86mm
86mm




13mm

Communication Protocol Zigbee® 3.0 Network	Battery life 730 days
Input CR2430 3V (battery not included)	Material Plastic
Working temperature -10°C ~ 45°C	Wattage 96W
Product Dimensions 86mmx86mmx13mm	Weight 100g (with package)

60mm
60mm
60mm
60mm
60mm
60mm

80 mm


LED BEHAVIOR



LED Status	Description
	Green LED blinks The remote is in pairing mode
	Green LED ON for short time once Remote button pressed


BATTERY REPLACEMENT

- Push the panel on the left. Open the cover
- Then, put the button battery in the battery slot

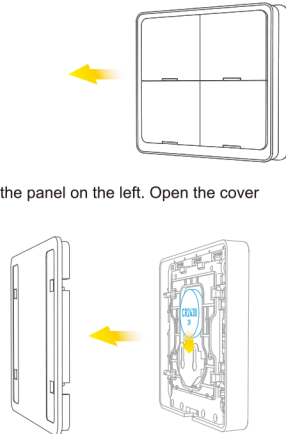

RESET TO FACTORY DEFAULT

- Press & hold button 1 for 10 seconds
- If successful, the LED(s) flash quickly

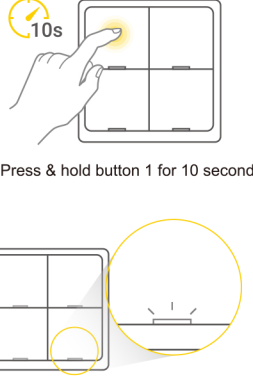

TROUBLESHOOTING

Problem	Possible Cause	Solution
Unable to pair	Remote is away from the hub or there are obstacles	Move the gateway closer to the product, & reconnect after powering on
	Remote is not in pairing mode	Reset the remote to factory default
	Remote is connected to another hub network	Reset the remote to factory default

Product specifications, size, shape, and prices are subject to change without notice, and actual product appearance may differ from that depicted on the packaging.


TIS CONTROL LIMITED

RM 1502-p9 Easey Comm Bldg 253-261
Hennessy Rd Wanchai, Hong Kong

www.tiscontrol.com

User Manual

Dion Wall Remote



CE

Please read the user manual carefully before operation