

■ **HO-I-EENV2T1D-V21T18** | 2MP thermal/optical bi-spectrum IP eyeball camera, IR max 15m, alarm i/o, power supply PoE or 12Vdc



- Leading image processing technology: Adaptive AGC, DDE, 3D DNR, NETD less than 40 mk (25°C), F#=1.1
- Powerful behavior analysis function, based on deep learning algorithm: Line crossing, Intrusion, Region Entrance & Exit
- Reliable temperature exception alarm function
- Advanced fire detection algorithm
- Bi-spectrum image fusion, picture in picture preview
- 160 × 120 (the resolution of output image is 320 × 240) resolution sensor, high sensitivity sensor, support contrast adjustment
- Shutter adjustment in various modes
- 3D DNR, 15 palettes of color adjustable, image detail enhancement



HORUS CAMERA SURVEILLANCE

Horus HO-I-EENV2T1D Thermal & Optical Network Eyeball Camera equipped with built-in GPU which support intelligent behavior analysis algorithm, can realize high precision VCA detection and real-time alarm. It is applied to fire-prevention purposes in indoor space such as: engine room, ATM, conference room, warehouse, museum, train station, gem, power station, and so on. The pre-alarm system helps you discover unexpected events immediately and protects you from property loss.

SPECIFICATIONS

Thermal Module	
Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays
Max. Resolution	160 × 120 (the resolution of output image is 320 × 240)
Pixel Interval	17µm
Response Waveband	8µm to 14µm
NETD	less than 40 mk (25°C), F#=1.1
Lens (Focal Length)	1.8 mm
MRAD	9.44 mrad
Field of View	90° × 66.4° (H × V)
Min. Focusing Distance	0.1 m
Aperture	F1.1
Optical Module	
Max. Image Resolution	1920 × 1080
Image Sensor	1/2.7" Progressive Scan CMOS

SPECIFICATIONS

Min. Illumination	Color: 0.002 Lux @(F1.2,AGC ON), B/W: 0.0002 Lux @(F1.2, AGC ON)
Shutter Speed	1s to 1/100,000s
Lens (Focal Length)	2.1 mm
Field of View	TBD(H × V)
WDR	120 WDR
Day & Night	IR cut filter with auto switch
Image Function	
Bi-spectrum Image Fusion	Fusion view of thermal view and overlaid details of the optical channel
Picture in Picture	Combines details of thermal and optical image PIP, overlay thermal image on optical image
Smart Function	
VCA (Video Content Analysis)	4 VCA rule types (Line Crossing, Intrusion, Region Entrance, and Region Exiting), up to 8 VCA rules.
Temperature Measurement	3 temperature measurement rule types, 21 rules (10 points, 10 areas, and 1 line).
Temperature Range	-20 °C to +150 °C (-4 °F to +302°F)
Temperature Accuracy	± 8 °C (± 14.4 °F)
Fire detection	Dynamic fire point detection, up to 10 fire points detectable.
Infrared	
IR Distance	Up to 15 m
IR Intensity and Angle	Automatically adjusted
Network	
Main Stream	Visible Light: 50Hz: 25fps (1920 × 1080), 25fps (1280 × 960), 25fps (1280 × 720) Visible Light: 60Hz: 30fps (1920 × 1080), 30fps (1280 × 960), 30fps (1280 × 720) Thermal: 25fps (160 × 120 (the resolution of output image is 320 × 240))
Sub Stream	Visible Light: 50Hz: 25fps (704 × 576), 25fps (640 × 480) Visible Light: 60Hz: 30fps (704 × 480), 30fps (640 × 480) Thermal: 25fps (160 × 120 (the resolution of output image is 320 × 240))
Video Compression	H.265/H.264, H.265+/H.264+ encoding with Baseline/Main/High Profile
Audio Compression	G.711u/G.711a/G.722.1/MP2L2/G.726/PCM
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour
Simultaneous Live View	Up to 20
User/Host level	Up to 32 users, 3 levels: Administrator, Operator, User
Security Measures	User authentication (ID and PW), MAC address binding, HTTPS encryption, IEEE 802.1x access control, IP address filtering
Integration	
Alarm Input	1-ch inputs (0-5vDC)
Alarm Output	1-ch relay outputs, alarm response actions configurable
Alarm Action	SD recording/Relay output/Smart capture/FTP upload/Email linkage
Audio Input	1 3.5mm Mic in/Line in interface. Line input: 2-2.4V[p-p], output impedance: 1KΩ±10%
Audio Output	Linear Level; Impedance: 600Ω

SPECIFICATIONS

Reset	1 Reset Button
Ethernet	1 RJ45 10M/100M Self-adaptive Ethernet interface, 1 RS-485 interface
SD Memory Card	Built-in Micro SD card slot, support Micro SD/SDHC/SDXC card (up to 256G), support manual/alarm recording
Analog Video Output	1.0V [p-p]/75Ω, PAL/NTSC/BNC
Application Programming	Open-ended API, support ISAPI and third-party management platform
Client	Horus VMS and app
Web Browser	IE9+, chrome31-chrome44, Firefox 30-Firefox51, Safari 5.02+(mac)
General	
Menu language	English
Power	12 VDC± 20%, two-core terminal block PoE (802.3af, class 3)
Power Consumption	12 VDC ± 20%: 0.7 A, max. 8W PoE (802.3af, class 3): 42.5 V to 57 V, 0.14 A to 0.22 A, max. 8.5W
Working Temperature/ Humidity	-30 °C to 60 °C (-22 °F to 140 °F), 95% or less
Protection Level	IP67 Standard TVS 6000V Lightning protection, surge protection, voltage transient protection
Dimensions	134.2 mm × 123.9 mm × 107.7 mm (5.28 " × 4.87" × 4.24 ")
Weight	TBD

DETECTION RANGE TABLE

* The table is only for reference, the performance may vary from camera to camera.

Smart Functions Range

Different targets trigger the VCA events within different range limits.


VCA Range (vehicles: 1.4x4.0m)	VCA Range (humans: 1.8x0.5m)	Temperature Measurement (object: 2x2m)	Temperature Measurement (object: 1x1m)	Fire Detecion (object: 2x2m)	Fire Detecion (object: 1x1m)
42m	14m	44m	22m	108m	54m

Wide Range Cover

There is range limit for detecting, recognizing, and identifying human/vehicle targets.

Detection Range (vehicles: 1.4x4.0m)	Detection Range (humans: 1.8x0.5m)	Recognition Range (vehicles: 1.4x4.0m)	Recognition Range (humans: 1.8x0.5m)	Identification Range (vehicles: 1.4x4.0m)	Identification Range (humans: 1.8x0.5m)
162m	53m	41m	13m	20m	7m

DIMENSIONS

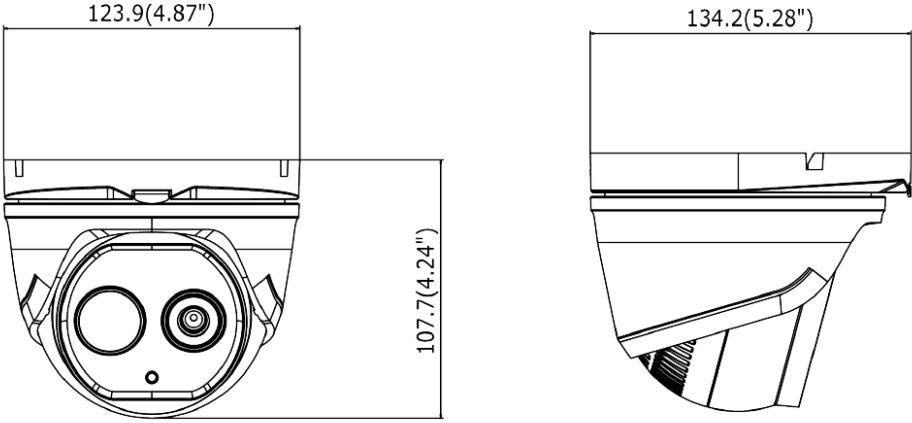

Unit: mm(inch)