

TFB-3165

Conventional Manual Call Point



TFB-3165 is designed to be used with all brands of conventional fire alarm systems and comply with EN54-11. Internal 470-ohm resistance allow ease of installation.

It has resettable operation structure which can be reset by using a special plastic key. Suitable for flush and surface mounting. An optional transparent protection cover can be installed to avoid false alarms by accidental pressing.


GENERAL FEATURES

- EN 54-11 Certified
- Resettable
- NC/NO Selection
- Includes 470 Ohm Resistance, does not Require Additional Connection
- Optional Transparent Protection Cover can be Installed. Cover can be Sealed
- Suitable for Flush and Surface Mounting
- Compatible with All Conventional Fire Alarm Systems r

Technical Specifications	TFB-3165
Standard	EN 54-11
Operating Type	A Type Manual
Resettable	Yes
Relay	NC/NO/470 Ohm
Power	5-32VDC
Dimensions (mm)	86 x 55 x 88 mm
Weight	165gr
Body Material and Color	RAL3001 RED
Type of Fragile Element	Resettable Polycarbonate
Operating Temperature	-10°C ~ 60°C
Humidity	≤93% RH at +40°C
Protection Class	IP30

TFA-0165

Transparent Protection Cover

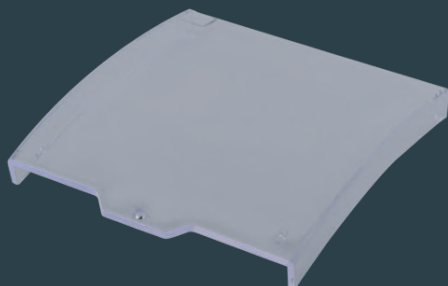

The cover is made of robust polycarbonate transparent material. It is used to prevent accidental button activation.

